

3.1 CMD_PWR

Hardware manual

www.pinetek-networks.com

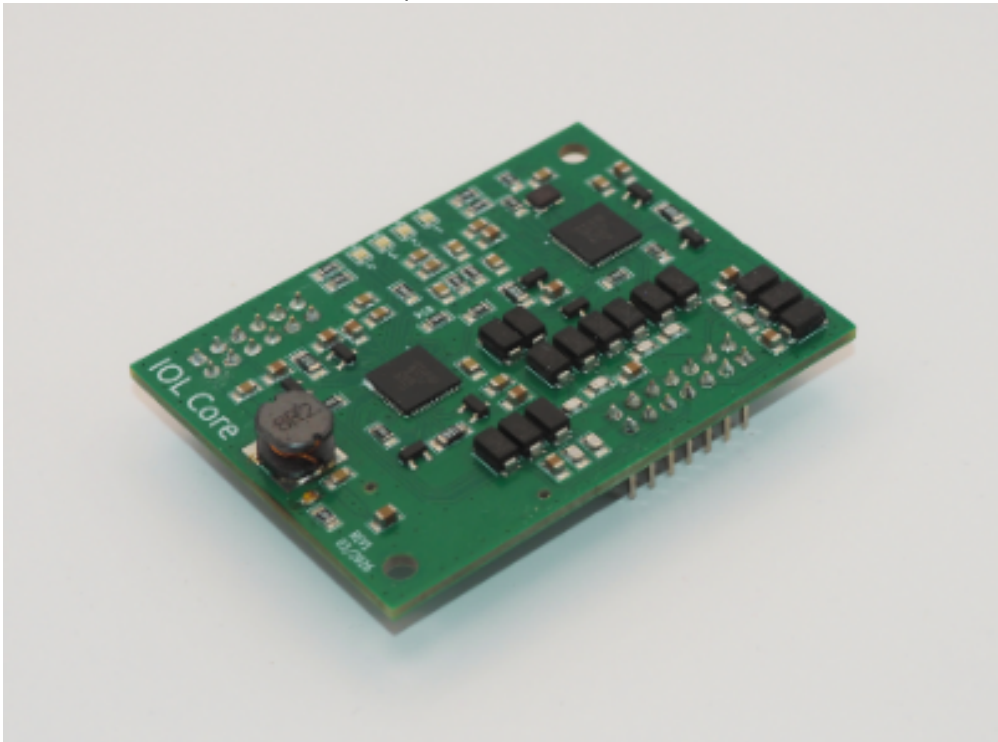


Table of Contents

3.1 CMD_PWR	5
-------------------	---

3.1 CMD_PWR

The power command switches the L+ power on the corresponding port. After switching on, the communication speed on the SDCI (COM1, COM2, COM3) is automatically detected and cyclic exchange of data is started.

Command:

Octet #	Usage
0	Command ID = 0x01
1	Port index 0x00 or 0x01
3	Power status 0x00 = OFF 0x01..0xFF=ON

Return Success:

Octet #	Usage
0	Command ID = 0x01
1	Port index 0x00 or 0x01
3	Power Status