

3.4 CMD_READ

Hardware manual

www.pinetek-networks.com

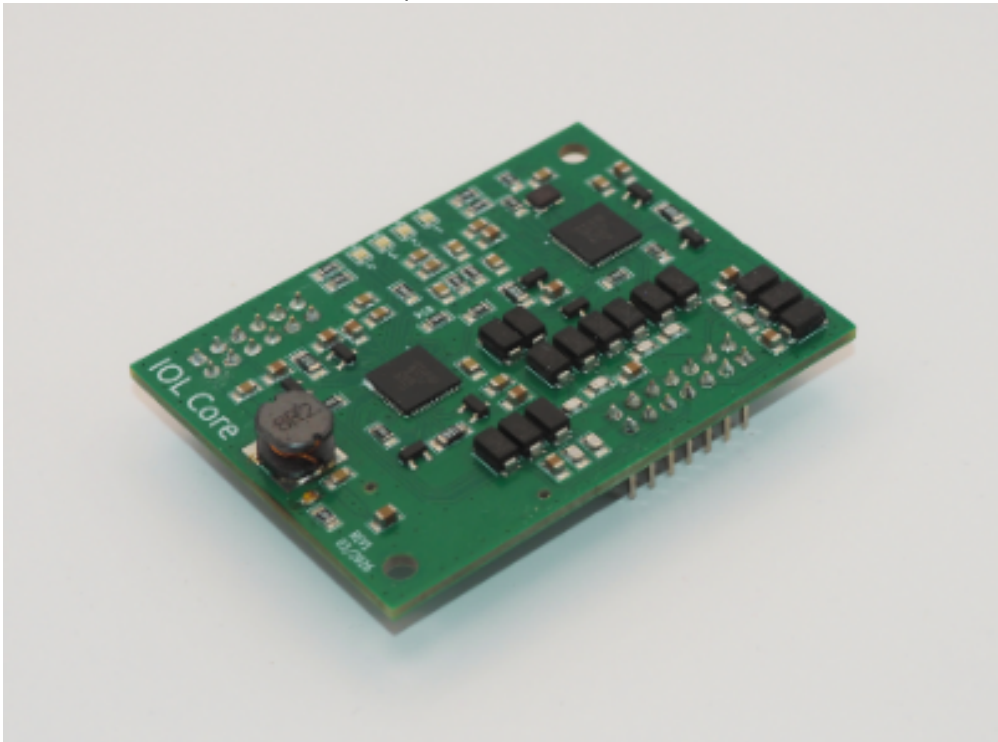


Table of Contents

3.4 CMD_READ	5
--------------------	---

3.4 CMD_READ

This command reads a parameter with the index and subindex as given on the corresponding port.

Command:

Octet #	Usage
0	Command ID = 0x04
1	Port index 0x00 or 0x01
2..3	Index, 16-bit value
4	Subindex
5	Length

The ***Length*** field is the desired/maximum length for the attribute. The structure of the attribute can be found in the SDCI device's documentation.

Return Success:

Octet #	Usage
0	Command ID = 0x04
1	Port index 0x00 or 0x01
2..3	Index, 16-bit value
4	Subindex
5	Read Length
6..	Read Data

The structure for the Read Data can be found in the SDCI device's documentation.