

3.5 CMD_WRITE

Hardware manual

www.pinetek-networks.com

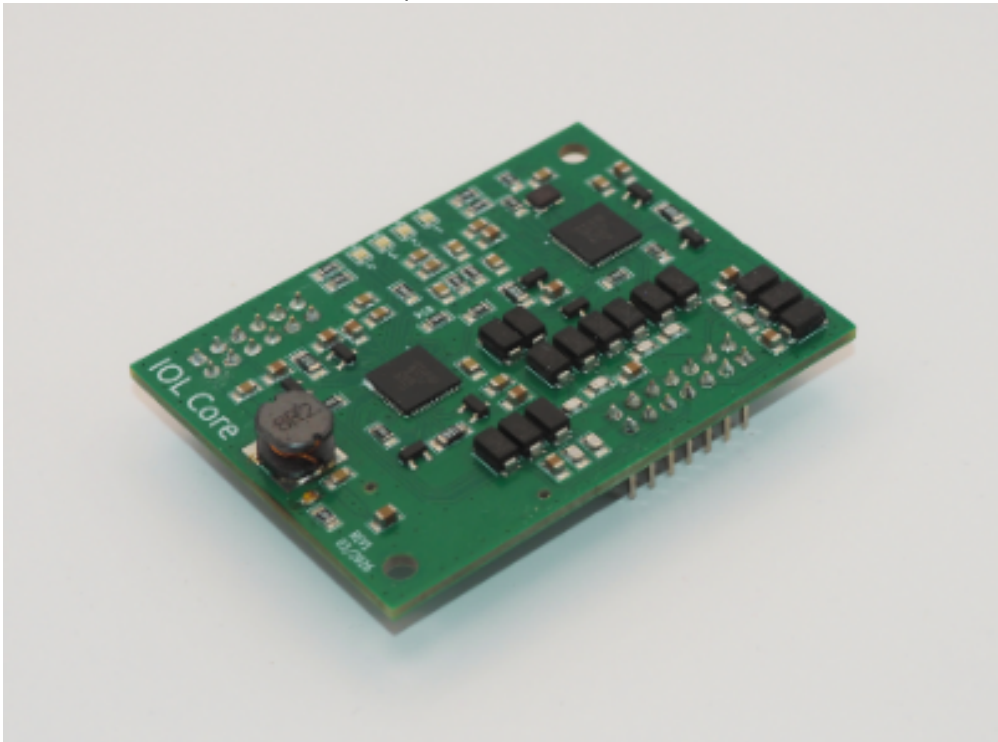


Table of Contents

3.5 CMD_WRITE	5
---------------------	---

3.5 CMD_WRITE

This command writes a parameter with the index and subindex as given on the addressed port.

Command:

Octet #	Usage
0	Command ID = 0x05
1	Port index 0x00 or 0x01
2..3	Index, 16-bit value
4	Subindex
5	Length
6..	Write Data

The structure of the **Write Data** can be found in the SDCI device's documentation.

Return Success:

Octet #	Usage
0	Command ID = 0x05
1	Port index 0x00 or 0x01
2..3	Index, 16-bit value
4	Subindex
5	Length (as given in the command)

To verify the write operation, a [read operation](#) (Command ID 0x04) can be used on the same ****Index**** and **Subindex**.